




API PLAN - 23

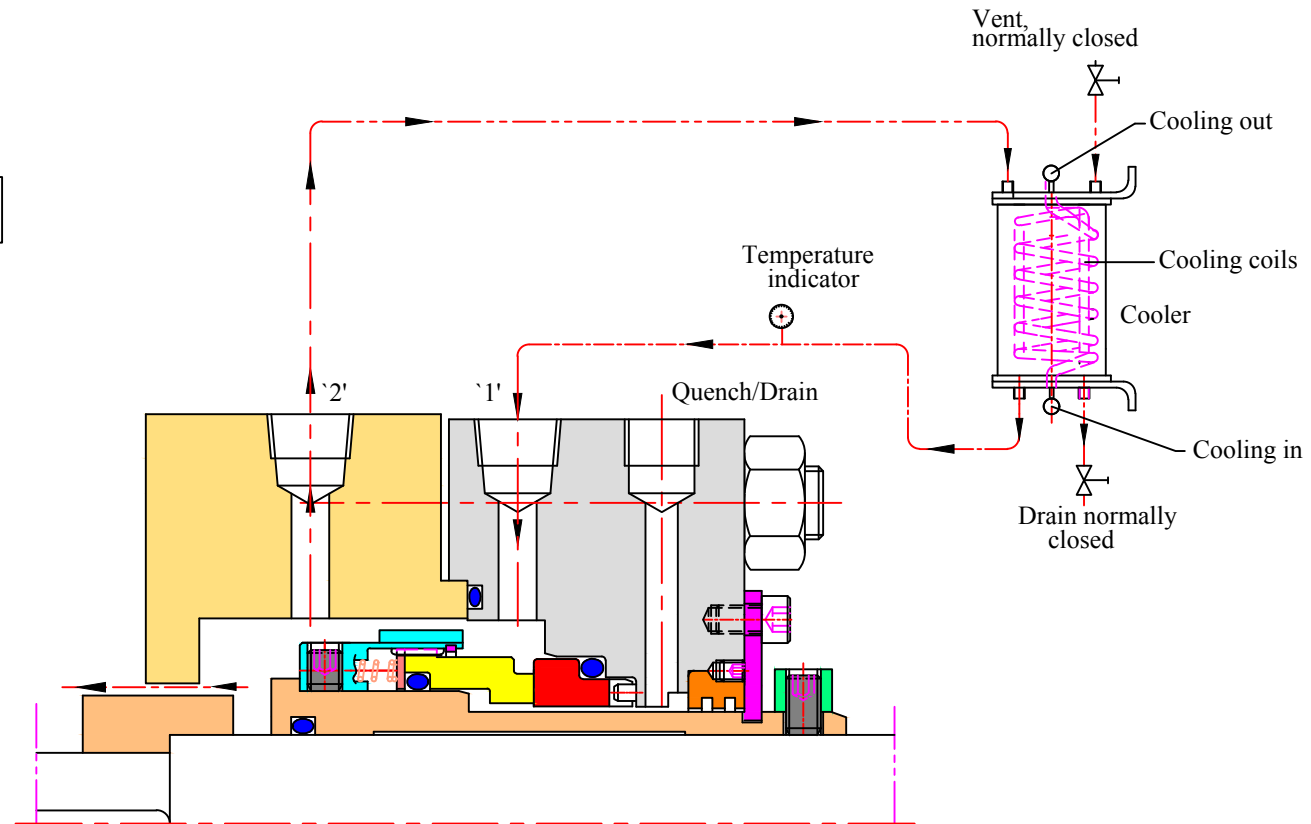

- Recirculating the process liquid from seal chamber to heat exchanger through pumping ring and back to seal chamber.
- This plan can be used on hot application to minimize the heat effect on the heat exchanger by cooling only the small amount of liquid that is recirculated.
- Connection `1` for flushing inlet.
- Connection `2` for flushing outlet.